




Electromagnetic Metering Pumps

EHN

Extensive Product Range
Highly Reliable, Best Selling Pumps

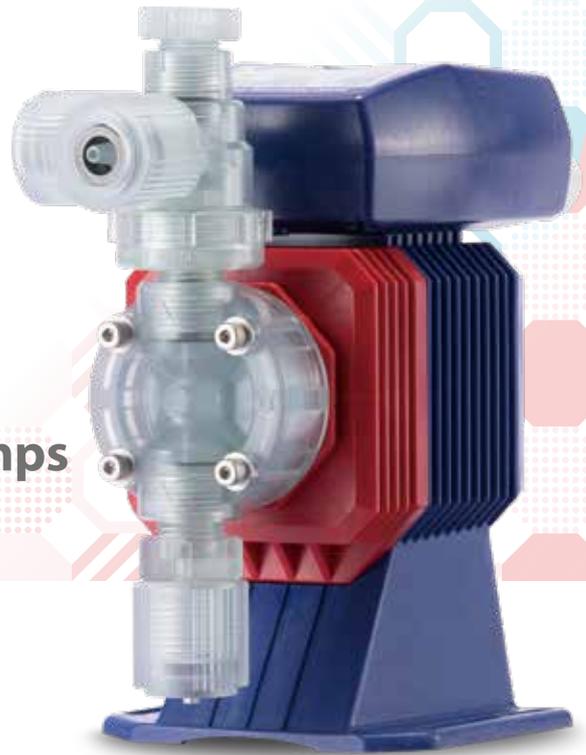

The Heart of Industry

The Latest Electromagnetic Metering Pump Equipped with Digital Controller & Universal Voltage



▲注意・CAUTION

- 使用前に必ず、正しい操作の順序を
ごらんください。
Observe and abide by the instructions
described in the instruction manual.
- 30分以上空運転は行わないで下さい。
Do not run pump dry for 30 minutes or more.
- 薬液吐出に注意、ホースを外したときポンプヘッドを分解
する際には必ず空配管の圧力を抜いて下さい。
Be careful of bleeding chemical. Release pressure in
discharge tubing before disconnecting tubing and
disassembling pump head.

MP2101



Pump Head Variation

Wide variety of standard pump head (VC/VH/PC/PH/PP/FC/SH), automatic air vent type (NAE), high compression type (55) and high pressure type (H).

• Refer to page 7 for details of NAE, 55 and H.



VC/VH type

PC/PH/PP type

FC type

SH type



High Resolution

Thanks to digitized controller, stroke speed can be adjusted by 1 spm step from 1 to 360 spm. Combined with stroke length adjustment, you can do the fine adjustment from very small flow to maximum flow rate.



Stroke length adjusting dial



Control panel



Control Unit

The highly-functional EHN-YN which is equipped with digital and analog inputs is added to the standard product line as well as EHN-R.



Universal Voltage

Universal voltage power source from 100 - 240VAC for all models. You are now free from worrying about power voltage.



Air Vent Valve

Standard pump head models (VC/VH/PC/PH/PP) equip air vent valve. Air in the pump chamber can be easily released by turning knob.



Water / Dust-Proof

Each unit such as driving unit and control unit is sealed to make the pump IP66 equivalent water/dust-proof.

• Do not install pump outdoor.



Multi Hose Connection

The use of a new hose stopper eliminates a twist in tubing.

• Except for the following

Wet end material: FC type, SH type

Accessories: Check valve CS type, Backflow prevention valve CV type, Back pressure valve, Flow checker

Digital Controller with Multifunctions

Standard type

EHN-R Series

- Key lock function prevents erroneous operation after controller programming.
- The mounted controller provides EXT and STOP functions. Multiply and Dividing operations become available by EXT functions and allow you to delicate pump control.



Controller Functions


Manual operation

Pump run/stop and stroke rate setting (1 to 360 spm) can be done by keys. Stroke rate can be set either when pump is running or stopped.

EXT operation


Multiply (1 : n)

Pump makes multiply operation by external pulse signal. Pump makes "n" times shots against one pulse signal input. "n" can be set from 1 to 999. Pulses which came while operation are put in memory up to 64535 shots.

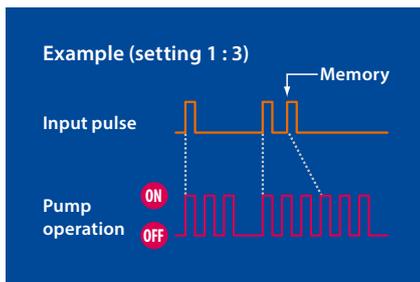

Dividing (n : 1)

Pump makes dividing operation by external pulse signal. Pump makes one shot against "n" times pulse input. "n" can be set from 1 to 999.

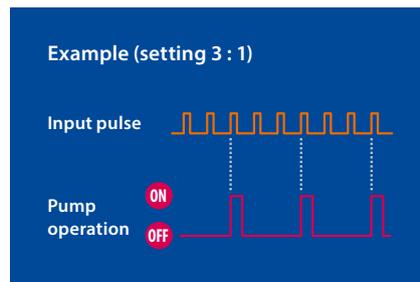


- If "n" is set at 1, pump makes synchronous operation. If pump is connected to optionally available EH controller, please use this function.

STOP function

Pump stops by external contact signal. Pump operates when stop signal input is released. This function enables pump ON/OFF control. This is convenient function when used in combination with level sensor.

- It is possible to operate pump while STOP signal comes in (Change over with keys). In this case, when pump is operated in EXT mode, pump operates synchronous with EXT signal input while STOP signal is coming in.

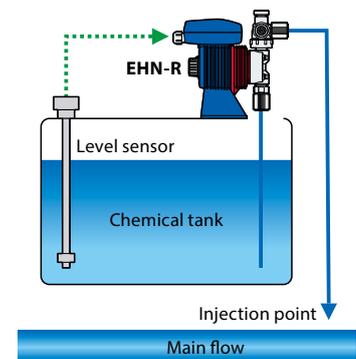

- Level sensor watches water level in tank, and stops pump when water level comes to lower limit.

Advanced type EHN-YN Series

- The features of both the EHN-Y and the FCM flow checker are integrated into the EHN-YN.
- Auxiliary functions including key lock and priming operation (max operation with the up and down keys depressed) are provided to support users.
- The FCM flow checker is optionally available.
The pump gives an alarm and starts running at full speed(360spm), removing entrained air or clogging, when the FCM does not detect a suction line flow. Operation at a set speed or programmed behaviour will be restored after the problems are removed.
The following three behavioural patterns are available.
PA mode/PA+AL mode/PA+AL+RE mode
Monitoring/alarmed a suction-line flow ensures safer pump operation.





Controller Functions

Manual operation

Pump run/stop and stroke rate setting (1 to 360 spm) can be done by keys. Stroke rate can be set either when pump is running or stopped.

Analog input operation

Proportional control of spm by programming 2 points between 0-20mA.

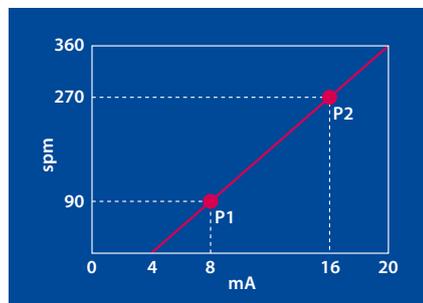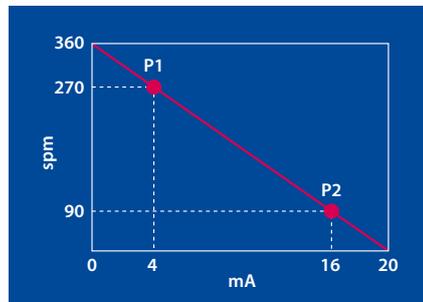

EXT operation

Multiply (1 : n)

Pump makes multiply operation by external pulse signal. Pump makes "n" times shots against one pulse signal input. "n" can be set from 1 to 999. Pulses which came while operation are put in memory up to 65535 shots.

Dividing (n : 1)

Pump makes dividing operation by external pulse signal. Pump makes one shot against "n" times pulse input. "n" can be set from 1 to 999.

- If "n" is set at 1, pump makes synchronous operation. If pump is connected to optionally available EH controller, please use this function.

STOP function


Pump stops by external contact signal. Pump operates when stop signal input is released. This function enables pump ON/OFF control. This is convenient function when used in combination with level sensor.

- It is possible to operate pump while STOP signal comes in (Change over with keys). In this case, when pump is operated in EXT mode, pump operates synchronous with EXT signal input while STOP signal is coming in.

Auto restoration


PA mode

When the FCM does not detect a suction-line flow for the PA time, the pump starts to run at full speed (360spm).

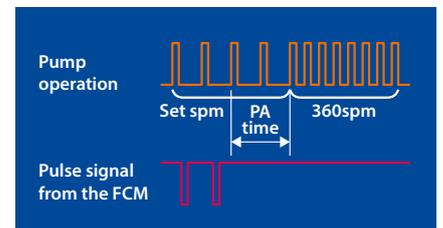


PA+AL mode

When the FCM does not detect a suction-line flow for the PA time, the pump starts to run at full speed (360spm) for the AL time and stops afterward.

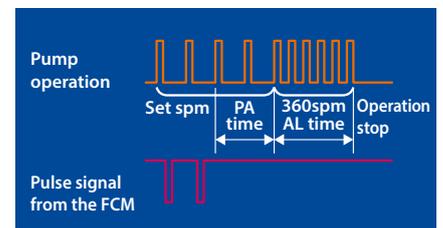

PA+AL+RE mode

When the pump starts to run at full speed (360spm) for the AL time and the FCM keeps detecting a suction-line flow over the RE time, operation at a set speed or programmed behaviour will be restored.

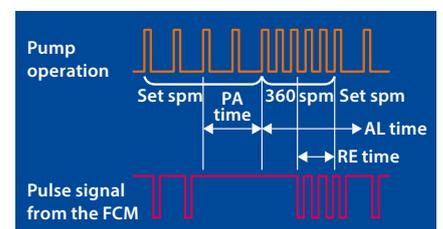

Technical Data



Wet End Materials (VC/VH/VS/PC/PH/PS/PP)

Material code	VC	VH	VS ^{Note1}	PC	PH	PS ^{Note2}	PP
Pump head	PVC			GFRPP			
Valve	Alumina ceramic	HASTELLOY® C276 equivalent	SUS316 equivalent	Alumina ceramic	HASTELLOY® C276 equivalent	SUS316 equivalent	Alumina ceramic
Valve seat	FKM	EPDM		FKM	EPDM		PCTFE
Valve guide	PVC			GFRPP			
Gasket	PTFE						
O-ring	FKM	EPDM		FKM	EPDM		FKM
Diaphragm	PTFE+EPDM (EPDM of diaphragm is not wet end.)						


Note 1: EHN-B31 and C31, 36 only.

Note 2: EHN-B31 and C31, 36 only.

Wet End Materials (FC/SH)

Material code	FC	SH
Pump head	PVDF	SUS316
Valve	Alumina ceramic	HASTELLOY® C276 equivalent
Valve seat	PCTFE	SUS316
Valve guide	PVDF	SUS316
Gasket	PTFE	
O-ring	-	
Diaphragm	PTFE+EPDM (EPDM of diaphragm is not wet end.)	

PVC: Transparent polyvinyl chloride
 GFRPP: Glass fiber reinforced polypropylene
 FKM: Fluor rubber
 EPDM: Ethylene propylene rubber
 PCTFE: Polychlorotrifluoroethylene
 PTFE: Polytetrafluoroethylene
 PVDF: Poly vinylidene fluoride

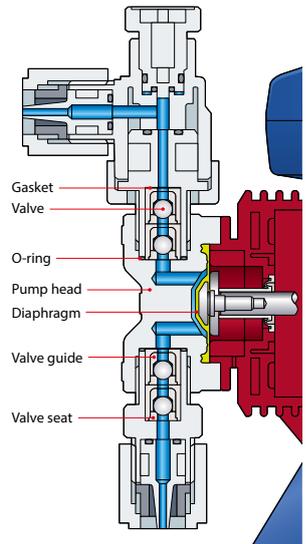

Model Identification (VC/VH/VS/PC/PH/PS/PP)

EHN	-	B	11	VC	M	K	R	-	NAE	-	HC
1		2	3	4	5	6	7		8		9

1 Pump series
EHN Series

2 Drive unit
(Average power consumption)
B : 20W
C : 24W

3 Effective diaphragm diameter
11 : 10mm
16 : 15mm
21 : 20mm
31 : 30mm
36 : 35mm

4 Wet end materials
VC, VH, VS, PC, PH, PS, PP

5 Connection
M : Multi hose connection
1/2 : Outlet/Airvent: $\varnothing 4 \times \varnothing 9$, Inlet: $\varnothing 4 \times \varnothing 6$ ^{Note}
Note: EHN-H only

Hose/Tube size (in mm)
B11, 16, 21 / C16, 21 : $\varnothing 4 \times \varnothing 9$, $\varnothing 4 \times \varnothing 6$
B31 / C31, 36 : $\varnothing 8 \times \varnothing 13$, $\varnothing 9 \times \varnothing 12$

6 Air vent
Blank : Provided
K : Not provided ^{Note}
Note: EHN-31/36 (VC/VS)R only

7 Controller
R : Standard type
YN : Advanced type

8 Optional configuration
NAE : Automatic air vent type
55 : High compression head type
H : High pressure type

9 NAE Separate pin material
Blank : Titanium
HC : HASTELLOY® C276 equivalent (B11VC-NAE only)
S6 : SUS316 (B11VC-NAE only)

Model Identification (FC/SH)

EHN	-	B	11	FC	2	R
1		2	3	4	5	6

1 Pump series
EHN Series

2 Drive unit
(Average power consumption)
B : 20W
C : 24W

3 Effective diaphragm diameter
11 : 10mm
21 : 20mm
31 : 30mm
36 : 35mm

4 Wet end materials
FC
SH

5 Connection size
FC 2 : $\varnothing 4 \times \varnothing 6$
6 : $\varnothing 10 \times \varnothing 12$
SH 9 : Rc 1/4

6 Controller
R : Standard type
YN : Advanced type

Pump Specifications

(VC/VH/VS/PC/PH/PS/PP)

Model		EHN-B11	EHN-B16	EHN-B21	EHN-B31	EHN-C16	EHN-C21	EHN-C31	EHN-C36
Max. discharge capacity	mL/min	38	65	100	230	80	130	270	450
	mL/shot	0.05 - 0.11	0.09 - 0.18	0.14 - 0.28	0.32 - 0.64	0.09 - 0.22	0.14 - 0.36	0.30 - 0.75	0.50 - 1.25
Max. discharge pressure	MPa	1.0	0.70	0.40	0.20	1.0	0.70	0.35	0.20
Stroke rate	spm	1 - 360							
Stroke length		50 - 100% (0.5 - 1.0mm)				40 - 100% (0.5 - 1.25mm)			
Connection (Hose/Tube dia.)	mm	Ø4×Ø9, Ø4×Ø6			Ø8×Ø13, Ø9×Ø12	Ø4×Ø9, Ø4×Ø6		Ø8×Ø13, Ø9×Ø12	
Power voltage		100 - 240VAC 50/60Hz single phase							
Air vent valve		Provided			Provided/Not Provided	Provided		Provided/Not Provided	
Accessory	Check valve	CAN-1			CAN-2-L	CAN-1		CAN-2-L	
	Braided hose	Ø4×Ø9 or Ø8×Ø13, made from PVC / 3m (PP type comes with EVA hose)							

• PP type is available with EHN-B11/16/31 and C21/31/36.

• The maximum discharge capacity of each model represents the figure when the pump is pumping clean water at maximum discharge pressure, rated voltage, ambient temperature, and 360 spm with stroke length 100%.

• 0.12MPa or more discharge pressure is needed to prevent over feeding (0.05MPa or more for the EHN-B31 and C36).

If the discharge pressure is at or below the required MPa, install a check valve or back pressure valve.

Operating condition: Liquid temperature range is 0 to 60 °C(0 to 40 °C for VC/VH)(on condition that liquid quality is not changed by freezing, viscosity change, or slurry interfusion)

Ambient temperature range is 0 to 40 °C

(FC/SH)

Model		EHN-B11	EHN-B21	EHN-C21	EHN-C31	EHN-C36
Max. discharge capacity	mL/min	38	100	130	270	410
	mL/shot	0.05 - 0.11	0.14 - 0.28	0.14 - 0.36	0.30 - 0.75	0.46 - 1.14
Max. discharge pressure	MPa	1.0	0.40	0.70	0.35	0.20
Stroke rate	spm	1 - 360				
Stroke length		50 - 100% (0.5 - 1.0mm)			40 - 100% (0.5 - 1.25mm)	
Connection	(FC) mm	Ø4×Ø6			Ø10×Ø12	
	(SH) inch	Rc 1/4				
Power voltage		100 - 240VAC 50/60Hz single phase				
Air vent valve		SH: Provided, FC: Not Provided				
Accessory		FC: BVC (Back pressure valve), SH: CS-1S (Check valve)				

• The maximum discharge capacity of each model represents the figure when the pump is pumping clean water at maximum discharge pressure, rated voltage, ambient temperature, and 360 spm with stroke length 100%.

Operating condition: Liquid temperature range is 0 to 60 °C (on condition that liquid quality is not changed by freezing, viscosity change, or slurry interfusion).

Controller Specifications

Controller type		EHN-R	EHN-YN
Operation mode		Manual EXT (Pulse multiply or dividing)	Manual EXT (MULT/DIV/ANA)
Control function	Setting	<ul style="list-style-type: none"> Manual stroke rate 1 - 360spm External Digital input operation Multiply 1:n n=1 - 999 Dividing n:1 n=1 - 999 	<ul style="list-style-type: none"> Manual stroke rate 1 - 360spm External Digital input operation Multiply 1:n n=1 - 999 Dividing n:1 n=1 - 999 Analog input Input single 0 - 20mA: Two points setting Output Alarm (When using FCM), synchronous with each shot
	Setting method	3 operating keys	4 operating keys
	Stop	The pump stops while receiving the stop signal (Make off/Make on can be selected by changing controller setting)	
Display		4-digit LCD, Operating condition or set value or so	
Input	Pulse	No voltage contact, Open collector	
	Stop	No voltage contact, Open collector	
	Analog	-	0 - 20mA
	FCM	-	Open collector
Alarm output		-	Dry contact
Sensor Power voltage		-	12VDC at 20mA
Power voltage		100 - 240VAC 50/60Hz single phase	

The Pump Can be Specialized for the Need of a Special Chemical Injection


The Optimum for Gaseous Liquid Feeding

Automatic air vent type EHN-NAE

- Gaseous liquid such as sodium hypochlorite can be injected without gas locking.
- This type equips automatic air vent mechanism. An air vent valve built-in pump chamber enables reliable air venting.
- Also equipped manual air vent valve enables easy pressure release in discharge piping.



Principle of Operation

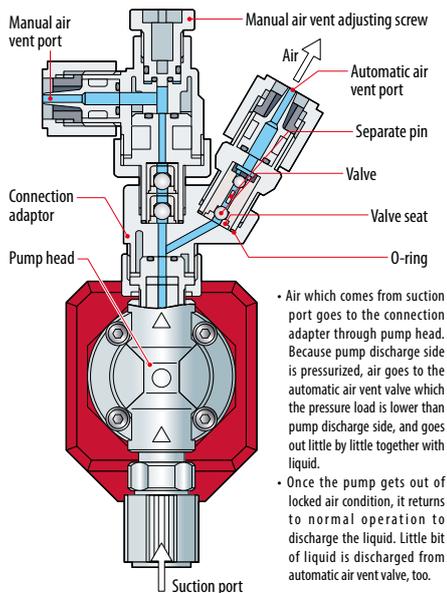

Wet End Materials

Material code	VC	VC-S6	VC-HC	VH
Pump head	PVC			
Connection adaptor	PVC			
Separate pin	Titanium	SUS316	HASTELLOY® C276 equivalent	
Valve	Zirconia ceramic ^{note}			HASTELLOY® C276 equivalent
Valve seat	FKM		EPDM	
O-ring	FKM		EPDM	

Note: Valve for pump head of VC, VC-S6 and VC-HC type is Alumina ceramic.
• VH type is a C16 type only.

Specifications

Model	EHN-B11-NAE	EHN-B16-NAE	EHN-C16-NAE	EHN-C21-NAE
Max. discharge capacity mL/min	30	55	65	110
Discharge capacity per shot mL/shot	0.04 - 0.08	0.08 - 0.15	0.07 - 0.18	0.12 - 0.31
Max. discharge pressure MPa	1.0	0.7	1.0	0.7
Stroke length adjustable range %	50 - 100		40 - 100	
Stroke rate spm	1 - 360			
Connection (Hose/Tube dia.)	Ø4×Ø9, Ø4×Ø6			
Power voltage	100 - 240VAC 50/60Hz single phase			
Accessory	Check valve CAN-1, PVC braided hose 3m			

Operating condition : Liquid temperature 0 - 40°C. Ambient temperature 0 - 40°C
• Max. discharge capacity represents the figure when pumping clear water at ambient temperature at max. discharge pressure. Pump discharges more liquid than shown above if it runs at lower discharge pressure. If discharge pressure is 0.12MPa or lower, be sure to use check valve to avoid over-feeding.


The Optimum for Sodium Hypochlorite Feeding

High compression head type EHN-55

- Increased compression ratio due to minimized dead volume in pump chamber.



Construction

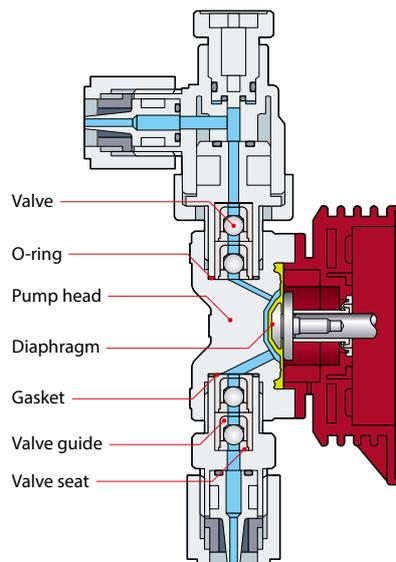

Wet End Materials

Material code	VC
Pump head	PVC
Valve	Alumina ceramic
Valve seat	FKM
Valve guide	PVC
Gasket	PTFE
O-ring	FKM
Diaphragm	PTFE+EPDM (EPDM of diaphragm is not wet end.)

Specifications

Model	EHN-B11VC-55	EHN-B16VC-55	EHN-B21VC-55
Max. discharge capacity mL/min	38	65	100
Discharge capacity per shot mL/shot	0.05 - 0.11	0.09 - 0.18	0.14 - 0.28
Max. discharge pressure MPa	1.0	0.7	0.4
Stroke length adjustable range %	50 - 100		
Stroke rate spm	1 - 360		
Connection (Hose/Tube dia.)	Ø4×Ø9, Ø4×Ø6		
Power voltage	100 - 240VAC 50/60Hz single phase		
Accessory	Check valve CAN-1, PVC braided hose 3m		

Operating condition : Liquid temperature 0 - 40°C. Ambient temperature 0 - 40°C
• Max. discharge capacity represents the figure when pumping clear water at ambient temperature at max. discharge pressure. Pump discharges more liquid than shown above if it runs at lower discharge pressure. If discharge pressure is 0.12MPa or lower, be sure to use check valve to avoid over-feeding.


Ideal for Boiler Chemical Injection into Pressurized Pipelines

High pressure type EHN-H

- Max. discharge pressure: 1.5MPa (Max. 360spm)



Construction

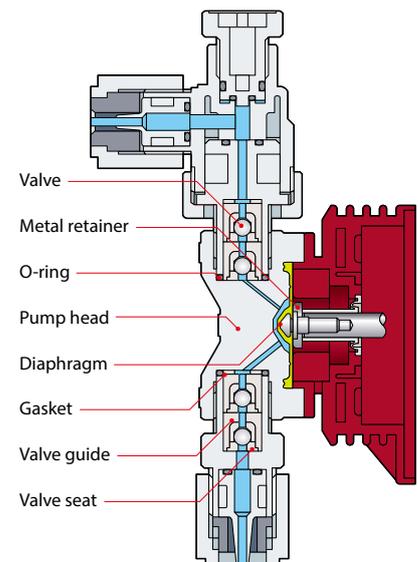

Wet End Materials

Material code	PH
Pump head	GFRPP
Valve	HASTELLOY® C276 equivalent
Valve seat	EPDM
Valve guide	GFRPP
Gasket	PTFE
O-ring	EPDM
Diaphragm	PTFE+EPDM (EPDM of diaphragm is not wet end.)

Specifications

Model	EHN-B11PH-H	EHN-C16PH-H
Max. discharge capacity mL/min	30	60
Discharge capacity per shot mL/shot	0.04 - 0.08	0.07 - 0.17
Max. discharge pressure MPa	1.5	
Stroke length adjustable range %	50 - 100	40 - 100
Stroke rate spm	1 - 360	
Connection (Hose/Tube dia.)	Outlet/Airvent: Ø4×Ø9, Inlet: Ø4×Ø6	
Power voltage	100 - 240VAC 50/60Hz single phase	
Accessory	Check valve CS-1E-2, Nylon tube 3m	


Operating condition : Liquid temperature 0 - 60°C. Ambient temperature 0 - 40°C
• Max. discharge capacity represents the figure when pumping clear water at ambient temperature at max. discharge pressure. Pump discharges more liquid than shown above if it runs at lower discharge pressure. If discharge pressure is 0.12MPa or lower, be sure to use check valve to avoid over-feeding.

The EHN Series Meets the Needs of Various Chemical Feeding in Water Treatment Fields

Injection of boiler chemical into through flow boiler

EHN-R

Because the pump can inject very small capacity, pure boiler chemical can be injected without diluting.

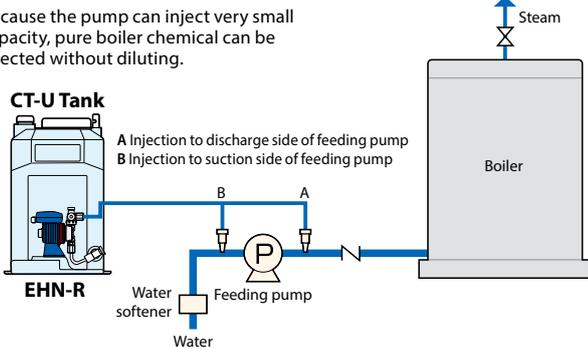


Metering dose

EHN-R

EHN-YN

Pump operates at pre-set number of shots by receiving signal from proximity switch. Number of shot can be set from 1 - 999.

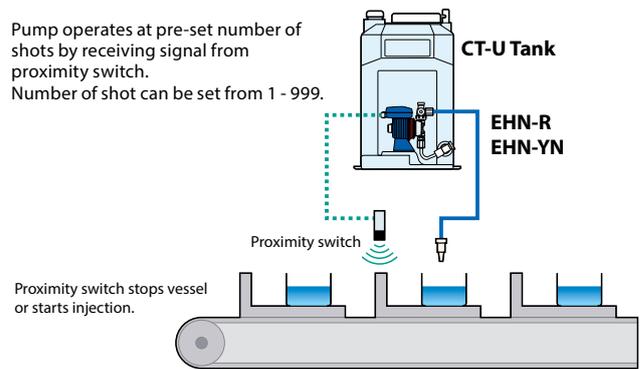


Sterilizing of swimming pool water (Residual chlorine concentration control)

EHN-R

Continuous injection of sodium hypochlorite.

Combined with Chlorine sterilizer, residual chlorine concentration can be controlled precisely.

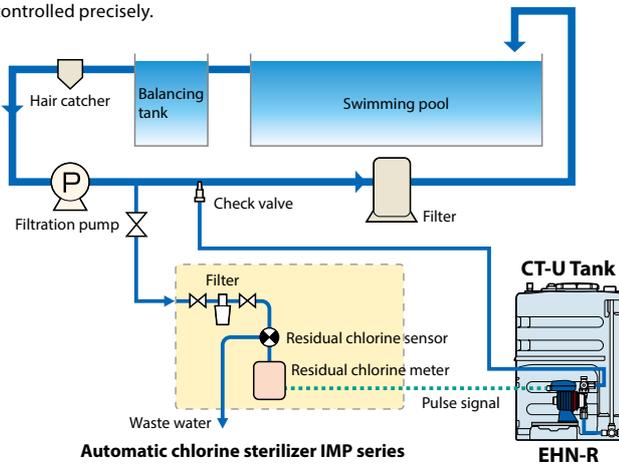

Automatic chlorine sterilizer IMP series


EHN-R

• Please refer to the single goods catalog of the separate volume for details of the IMP series.

Electroless plating system (Planting solution supply/ Conductivity control of cleaning water)

EHN-R

Conductivity controller W100

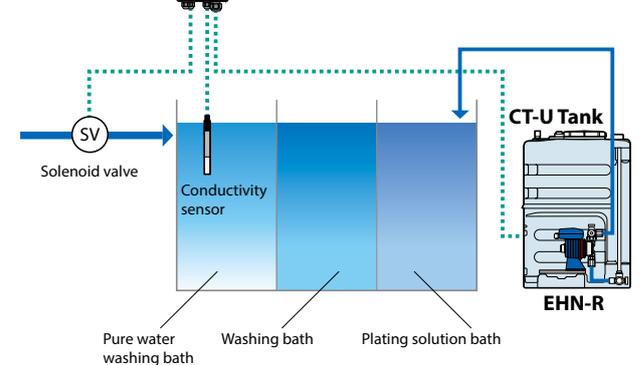


• Please refer to the single goods catalog of the separate volume for details of the TC-300.

Sterilizing of distilled water (Proportional mixing of cleaning water and sterilizing agent)

EHN-R

EHN-YN

Pump injects sterilizing agent in proportion to the flow rate of cleaning water by the signal from pulse oscillating flow meter. Same mixing concentration can be kept regardless of the change of cleaning water flow rate.

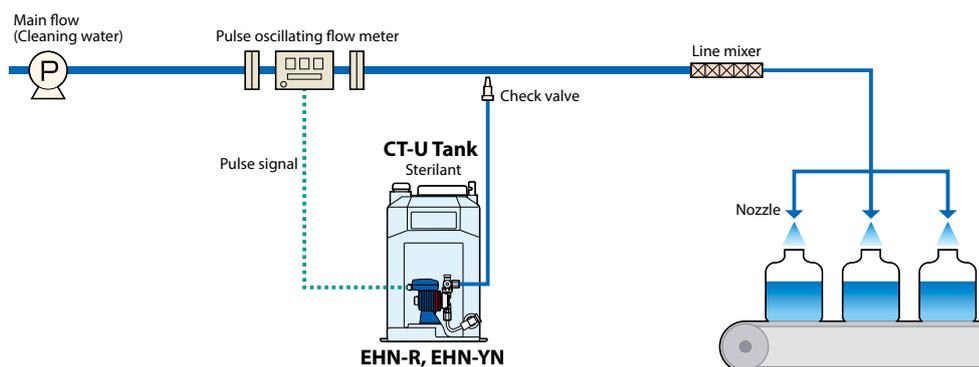

Optional Accessories

Check valve

Mount the check valve at the end of discharge hose for the prevention of over feeding, backflow, and siphon action.
Note: CBN type is an option.

CAN type : Standard accessory



CBN type : In-line type check valve.
Install it between hoses.



CS type : Stainless type for high liquid temperature.
General model and boiler model are available.



Model	Connection		Set Press		Material			Applicable pump	Wet end material code			
	IN	OUT	MPa		Body	Spring	O-ring					
CAN-1VC-M	04x09	04x06	0.17	±0.04	PVC	HASTELLOY® C276 equivalent	FKM	B11, 16, 21 C16, 21	VC			
CAN-1VC-3	06x08	06x08								0.05	+0.04 -0.03	FKM
CAN-1VC-23	06x012	06x012	0.17	±0.04					FKM			
CAN-1VE-M	04x09	04x06								0.05	+0.04 -0.03	FKM
CAN-1VE-3	06x08	06x08	0.17	±0.04					FKM			
CAN-1VCL-M	04x09	04x06								0.05	+0.04 -0.03	FKM
CAN-1VEL-M	04x09	04x06	0.17	±0.04					FKM			
CAN-2VCL-M	08x013	09x012								0.05	+0.04 -0.03	FKM
CAN-2VEL-M	08x013	09x012	0.17	±0.04					FKM			
CAN-2VC-M	04x09	04x06								0.05	+0.04 -0.03	FKM
CAN-2VE-M	04x09	04x06	0.17	±0.04	FKM	EPDM	C31	VC				
CAN-1V-M	04x09	04x06							0.34	±0.04	GFRPP CFRPP	HASTELLOY® C276 equivalent
CAN-1E-M	04x09	04x06	0.05	+0.04 -0.03	GFRPP CFRPP	HASTELLOY® C276 equivalent	FKM	B31, C36				
CAN-2V-M	08x013	09x012							0.17	±0.04	GFRPP CFRPP	HASTELLOY® C276 equivalent
CAN-2E-M	08x013	09x012	0.05	+0.04 -0.03	GFRPP CFRPP	HASTELLOY® C276 equivalent	FKM	B31, C36				
CAN-1VCH-M	04x09	04x06							0.17	±0.04	PVC	HASTELLOY® C276 equivalent
CAN-1VCH-23	06x012	06x012	0.05	+0.04 -0.03	PVC	HASTELLOY® C276 equivalent	FKM	B31, C36				
CAN-1VEH-M	04x09	04x06							0.17	±0.04	GFRPP CFRPP	HASTELLOY® C276 equivalent
CAN-1VH-M	04x09	04x06	0.05	+0.04 -0.03	GFRPP CFRPP	HASTELLOY® C276 equivalent	FKM	B31, C36				
CAN-1EH-M	04x09	04x06							0.17	±0.04	GFRPP CFRPP	HASTELLOY® C276 equivalent
CBN-1VC-M	04x09	04x06	0.17	±0.04	PVC	HASTELLOY® C276 equivalent	FKM	B11, 16, 21 C16, 21				
CBN-1VC-3	06x08	06x08							0.05	+0.04 -0.03	FKM	EPDM
CBN-1VC-23	06x012	06x012	0.17	±0.04								
CBN-1VC-24	05x08	05x08							0.05	+0.04 -0.03	FKM	EPDM
CBN-1VE-M	04x09	04x06	0.17	±0.04								
CBN-1VE-3	06x08	06x08							0.05	+0.04 -0.03	FKM	EPDM
CBN-2VCL-M	08x013	09x012	0.17	±0.04								
CBN-2VEL-M	08x013	09x012							0.05	+0.04 -0.03	FKM	EPDM
CBN-2VC-M	04x09	04x06	0.17	±0.04								
CBN-2VE-M	04x09	04x06							0.05	+0.04 -0.03	FKM	EPDM
CBN-1V-M	04x09	04x06	0.34	±0.04	GFRPP CFRPP	HASTELLOY® C276 equivalent	FKM	B11, 16, 21 C16, 21				
CBN-1V-3	06x08	06x08							0.05	+0.04 -0.03	GFRPP CFRPP	HASTELLOY® C276 equivalent
CBN-1E-M	04x09	04x06	0.17	±0.04	GFRPP CFRPP	HASTELLOY® C276 equivalent	FKM	C31				
CBN-1E-3	06x08	06x08							0.05	+0.04 -0.03	GFRPP CFRPP	HASTELLOY® C276 equivalent
CBN-2V-M	08x013	09x012	0.17	±0.04	GFRPP CFRPP	HASTELLOY® C276 equivalent	FKM	C31				
CBN-2E-M	08x013	09x012							0.05	+0.04 -0.03	GFRPP CFRPP	HASTELLOY® C276 equivalent
CBN-1VCH-M	04x09	04x06	0.17	±0.04	PVC	HASTELLOY® C276 equivalent	FKM	B11, 16, 21 C16, 21				
CBN-1VCH-3	06x08	06x08							0.05	+0.04 -0.03	PVC	HASTELLOY® C276 equivalent
CBN-1VCH-23	06x012	06x012	0.17	±0.04	PVC	HASTELLOY® C276 equivalent	FKM	C31				
CBN-1VCH-24	05x08	05x08							0.05	+0.04 -0.03	PVC	HASTELLOY® C276 equivalent
CBN-1VEH-M	04x09	04x06	0.34	±0.04	GFRPP CFRPP	HASTELLOY® C276 equivalent	FKM	B11, 16, 21 C16, 21				
CBN-1VEH-3	06x08	06x08							0.05	+0.04 -0.03	GFRPP CFRPP	HASTELLOY® C276 equivalent
CBN-1VH-M	04x09	04x06	0.17	±0.04	GFRPP CFRPP	HASTELLOY® C276 equivalent	FKM	C31				
CBN-1EH-M	04x09	04x06							0.05	+0.04 -0.03	GFRPP CFRPP	HASTELLOY® C276 equivalent
CBN-1EH-7	014x038	014x038	0.17	±0.04	GFRPP CFRPP	HASTELLOY® C276 equivalent	FKM	C31				
CCA-1FC-4x6	04x06	04x06							0.04 or more	±0.03	PVDF	HASTELLOY® C276 equivalent
CS-1S	R1/4	R1/4	0.2	±0.03	SUS316	HASTELLOY® C276 equivalent	-	B11, 16, 21 C21, 31 C36				
CS-1SL	Thread	Thread							0.05	±0.03	SUS316	HASTELLOY® C276 equivalent
CS-1E	04x06	04x06	0.12	±0.04	SUS304	HASTELLOY® C276 equivalent	EPDM	B11, 16, 21 C16, 21				
CS-1E-2	04x06	04x06							0.12	±0.04	SUS304	HASTELLOY® C276 equivalent

Back pressure valve with check valve

The back pressure valve enhances the dosing accuracy and prevents backflow. Set pressure is adjustable.



Model	Connection		Set Press		Material			Applicable pump	Wet end material code			
	IN	OUT	MPa		Body	Valve	O-ring					
BVC-1TV-4H	04x06	R3/8, R1/2 Thread	0.2	±0.02	PVDF	FKM	-Note	B11, 21 C21	FC			
BVC-1TV-10H	010x012	Hose	0.1	±0.02						0.2	±0.02	C36
BVC-1TV-10H	010x012		Hose	0.2								
BVC-1PVL-4H	04x09	R3/8, R1/2 Thread		0.2	±0.02	PVC	FKM	FKM	B11, 16, 21 C16, 21	VC		
BVC-1PEL-4H	04x09	Hose	EPDM				EPDM	C31				
BVC-1PVL-8H(8x13)	08x013		R3/8, R1/2 Thread				FKM				FKM	
BVC-1PEL-8H(8x13)	08x013	Hose	EPDM	EPDM	C31							

Note: Gasket made of PTFE.

Dampner

Mount the accumulator on discharge side hose to reduce vibration comes from pulsation.



Model	Connection Hose	Capacity	Material			Allowable liquid/dampner pressure	Use
			Body	Vladar	O-ring		
AQ-10TV	04x09	164mL	PVDF	FKM	FKM	0.05 - 0.5 MPa	Acid
AQ-10TE	04x06			EPDM	EPDM		Alkaline
AQ-10TV-4	08x013			FKM	FKM		Acid
AQ-10TE-4				EPDM	EPDM		Alkaline

• A "charging kit" is required to fill with gas.

Flow checker

Monitors the suction-line flow and sends a signal to the pump at each shot. Its mounting position is beneath the pump inlet, so can detect a system upset under any piping or operating condition.



Model	FCM-VC-MS	FCM-VH-MS
Power voltage	5-24VDC	
Output ^{Note1}	NPN open collector	
Max. power consumption (Load capacity)	8mA (15mA)	
Connection (Hose)	04x09, 04x06	
Materials	Wet ends	PVC
	O-ring	FKM, EPDM
Applicable pumps	EHN-B11, 16, 21, / C16, 21	
Wet end material code	VC	VH

- Min. discharge pressure: 0.2 MPa (Max. pressure varies with pump spec.)
- Min. discharge capacity: 0.1 mL/shot (Max. capacity varies with pump spec.)
- Run the pump with 100% stroke length when the FCM is installed.
- Ambient temp: 0 - 40°C Relative humidity: 35 - 85%RH Liquid temp: 0 - 40°C Max viscosity: 20mPa-s or below

Note1: Loosen the hex socket head screw(M3) and adjust the adjusting screw (remove it as necessary) when the pulse output is unstable.

Note2: Install a check valve to observe the minimum discharge pressure of 0.2MPa.

Flow counter/Controller

The pressure sensor detects pulsation to monitor the flow. Air lock and hose disconnection are also can be detected.



Flow counter

Model	Material			Applicable controller	Applicable pump	Wet end material code
	Sensor	Body	Rubber			
FCP-1VC	Alumina ceramic	PVC	FKM	S3D2-CK	B11, 16, 21 C16, 21	VC
FCP-1VE			EPDM			VH
FCP-1PC		GFRPP	FKM			PC
FCP-1PE			EPDM			PH

• Pulse output range: 0.3 - 1.0 MPa

Controller

Model	Material				Applicable pump	Note
	Power voltage	Setting method	Output	Warnig time		
S3D2-CK	100 - 240VAC	DIN Rail	Relay output (1c)	0.1 - 1/1 - 10s	B11, 16, 21 / C16, 21	Omron product

Degassing joint

Mount at the pump inlet in order to prevent gas lock by degassing the gas bubbles generated in the suction line. (e.g. sodium hypochlorite application)



Model	Connection		Material		Applicable pump
	Joint inlet	Gas vent	Body	O-ring	
DG-VC	04x06	08x013	PVC	FKM	B11, 16, 21 C16, 21
DG-VH	04x09	09x012		EPDM	

T-joint

Used to branch off hose piping.



Model	Connection		Material Body	Applicable pump	Wet end material code
	Hose	Thread			
TJ-4H	Ø4xØ9		PVC	B11, 16, 21 / C16, 21	VC, VH
TJ-8H	Ø8xØ13			B31 / C31, 36	VC, VS
TJN ^{Note}	Ø4xØ6, Ø4xØ9, Ø5xØ8, Ø6xØ8, Ø6xØ11, Ø6xØ12, Ø8xØ13, Ø9xØ12, Ø10xØ12, Ø11xØ12, Ø11xØ13, Ø11xØ12			B11, 16, 21 / C16, 21	VC, VH
				B31 / C31, 36	VC, VS

Note: The hose/tube connection set is not included and it has to be provided separately. Please select 3 sets of the required size from the table above.

Hose flange

The hose flange is the adapter for connecting hose to flange. Hose flange with the check valve is also available.



Model	Connection		Material			Applicable pump	Wet end material code			
	Hose	Flange	Body	O-ring	Check valve model					
15FCAN-1VC-M	Ø4xØ9	JIS10K 15AFF	PVC	FKM	CAN-1VC	B11, 16, 21	VC			
15FCAN-1VE-M	Ø4xØ6			EPDM	CAN-1VE	C16, 21	VH			
15FCAN-2VC-M	Ø8xØ13			FKM	CAN-2VC	C31	VC			
15FCAN-2VE-M	Ø9xØ12			EPDM	CAN-2VE		VS			
15FVNxMS	Ø4xØ9			FKM			B11, 16, 21	VC		
15FENxMS	Ø4xØ6			EPDM			C16, 21	VH		
15FVNxML	Ø8xØ13			FKM			B31	VC		
15FENxML	Ø9xØ12			EPDM			C31, 36	VS		
20FCAN-1VC-M	Ø4xØ9			JIS10K 20AFF	PVC	FKM	CAN-1VC	B11, 16, 21	VC	
20FCAN-1VE-M	Ø4xØ6					EPDM	CAN-1VE	C16, 21	VH	
20FCAN-2VC-M	Ø8xØ13					FKM	CAN-2VC	C31	VC	
20FCAN-2VE-M	Ø9xØ12					EPDM	CAN-2VE		VS	
20FVNxMS	Ø4xØ9	FKM					B11, 16, 21	VC		
20FENxMS	Ø4xØ6	EPDM					C16, 21	VH		
20FVNxML	Ø8xØ13	FKM					B31	VC		
20FENxML	Ø9xØ12	EPDM					C31, 36	VS		
25FVNxMS	Ø4xØ9	JIS10K 25AFF	PVC			FKM		B11, 16, 21	VC	
25FENxMS	Ø4xØ6					EPDM			C16, 21	VH
25FVNxML	Ø8xØ13					FKM			B31	VC
25FENxML	Ø9xØ12					EPDM			C31, 36	VS

Union connector

Use the union connector to a connection between different bore hoses.



Model	Connection		Material		Applicable pump	Wet end material code		
	IN	OUT	Body	O-ring				
HJVN-1/2	Ø4xØ9	Ø4xØ6	PVC	FKM	B11, 16, 21 / C16, 21	VC		
HJVN-1/18		Ø6xØ11						
HJVN-2/3	Ø4xØ6	Ø6xØ8					B31 / C16, 21	
HJVN-4/5	Ø8xØ13	Ø9xØ12						
HJEN-1/2	Ø4xØ9	Ø4xØ6			PVC	EPDM	B11, 16, 21 / C16, 21	VH
HJEN-1/18		Ø6xØ11						
HJEN-2/3	Ø4xØ6	Ø6xØ8	B31 / C16, 21					
HJEN-4/5	Ø8xØ13	Ø9xØ12						

* Same bore hoses are available as option.

EHN pump base

This special pump base is used to elevate the pump when it is difficult to connect the suction side piping.



Model	Material	Application	Height	Note
EHN-B-M	PVC	For replacing an existing pipe	12mm	EHN-B type only
	SUS304		70mm	
EHN-C-M	PVC		12mm	EHN-C type only
	SUS304		70mm	
EHN-B/C-M	PVC	For installing a new pipe	12mm	EHN-B/C type shared
	SUS304		70mm	

Multifunction valve

The multifunction valve functions as a back pressure valve, air vent valve, and relieve valve. The set pressure of the back pressure and relief valve is fixed.



Model	Connection Hose	Applicable pump	Set pressure		Material		
			Back pressure	Relief pressure	Body	Diaphragm	O-ring
MFV-HTC	Ø4xØ6, Ø6xØ8, Ø6xØ12, Ø5xØ8	B11, 16 / C16, 21	0.25 MPa	1.25 MPa	PVDF	PTFE+EPDM	FEPM
MFV-MTC	B21: Ø4xØ6, Ø6xØ8, Ø6xØ12, Ø5xØ8 C31: Ø9xØ12, Ø10xØ12	B21, C31					
MFV-LTC	Ø9xØ12, Ø10xØ12	B31, C36					

Hose coupler

The Hose coupler offers a secure connection between hose and pipe.



Thread connection

Model	Connection		Material		Applicable pump	Wet end material code		
	Hose	Thread	Body	O-ring				
V4VN-3/8-M	Ø4xØ9	R3/8	PVC	FKM	B11, 16, 21 C16, 21	VC		
V4EN-3/8-M				EPDM		VH		
V4VN-1/2-M				FKM		VC		
V4EN-1/2-M		EPDM		VH				
V8VN-3/8-M		R3/8		Ø8xØ13		FKM	B31 C31, 36	VC
V8EN-3/8-M						EPDM		VS
V8VN-1/2-M	FKM		VC					
V8EN-1/2-M	EPDM	VS						

VP plumbing connection

Model	Connection		Material		Applicable pump	Wet end material code
	Hose	VP plumbing	Body	O-ring		
V4VN-13-M	Ø4xØ9	VP13	PVC	FKM	B11, 16, 21 C16, 21	VC
V4EN-13-M				EPDM		VH
V4VN-16-M				FKM		VC
V4EN-16-M		EPDM		VH		
V4VN-20-M		VP20		FKM		VC
V4EN-20-M				EPDM		VH
V8VN-13-M			VP13	FKM	B31 C31, 36	VC
V8EN-13-M		EPDM		VS		
V8VN-16-M		VP16		FKM		VC
V8EN-16-M				EPDM		VS
V8VN-20-M				VP20		FKM
V8EN-20-M		EPDM				VS

Foot valve with strainer

Mount the foot valve at the end of suction hose. The foot valve with a strainer and a ceramic weight ball prevents backflow and foreign matter interfusion. Inlet bore can be selected according to hose bore.



Model	Connection Hose	Material				Applicable pump	Wet end material code
		Strainer	Body	O-ring	Valve ball		
FSCN-1	Ø4xØ9	PE	PVC	FKM	Alumina ceramic	B11, 16, 21 C16, 21	VC
FSCN-2	Ø4xØ6						
FSCN-3	Ø6xØ8						
FSCN-4	Ø8xØ13						
FSCN-5	Ø9xØ12						

* Mesh size is 150 mesh.

Strainer with foot valve

Mount the strainer at the end of suction hose. The strainer with a foot valve prevents backflow and foreign matter interfusion. Inlet bore can be selected according to hose bore.




Model	Connection Hose	Material				Applicable pump	Wet end material code					
		Strainer	Body	O-ring	Valve ball							
FSVN-1	Ø4xØ9	Aflon	PVC	FKM	Alumina ceramic	B11, 16, 21 C16, 21	VC					
FSVN-2	Ø4xØ6											
FSVN-3	Ø6xØ8											
FSVN-4	Ø8xØ13					EPDM	HASTELLOY® C276 equivalent	B11, 16, 21 C16, 21	VH			
FSVN-5	Ø9xØ12									SUS316 equivalent	B31 C31, 36	VS
FSEN-1	Ø4xØ9											
FSEN-2	Ø4xØ6											
FSEN-3	Ø6xØ8			GFRPP	EPDM		HASTELLOY® C276 equivalent	B11, 16, 21 C16, 21	PH			
FSSN-4	Ø8xØ13											
FSSN-5	Ø9xØ12											
FSPEN-1	Ø4xØ9					FKM	Alumina ceramic	SUS316 equivalent	B31 C31, 36	PS		
FSPEN-2	Ø4xØ6											
FSPEN-3	Ø6xØ8											
FSPEN-4	Ø8xØ13											
FSPEN-5	Ø9xØ12											
FSPVN-1	Ø4xØ9	FKM	Alumina ceramic	HASTELLOY® C276 equivalent	B11, 16, 21 C16, 21	PC						
FSPVN-2	Ø4xØ6											
FSPVN-3	Ø6xØ8											
FSPVN-4	Ø8xØ13											
FSPVN-5	Ø9xØ12											

* Mesh size is 20 mesh.


Dimensions in mm

EHN-B□MR


• VC, VH, VS, PC, PH, PS, PP




• FC



• SH




• KR




EHN-B□MYN


• VC, VH, VS, PC, PH, PS, PP

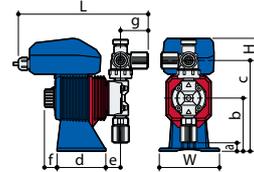

• FC




• SH




EHN-C□MR, EHN-C□KR


• VC, VH, VS, PC, PH, PS, PP




• FC



• SH




• KR




EHN-C□MYN


• VC, VH, VS, PC, PH, PS, PP

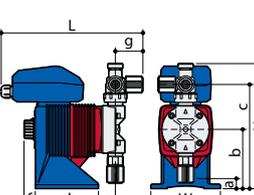

• FC



• SH



EHN-R (VC, VH, VS, PC, PH, PS, PP)

Model	W	(H)	(L)	(a)	b	(c)	d	(e)	(f)	(g)	h	i	j	k	l	m	n	o
EHN-B11, 16, 21	100	189	202	14	90	154	81.5	25	21	47	88	7	16	10	32	6.2	-	5
EHN-B31		201	204	-		166		27										
EHN-C16, 21	116	199	220	25 ^{Note1}	100	164	105	27	18	47	100	8	37	15	30	7	95	8
EHN-C31, 36		211 ^{Note2}	222	9 ^{Note3}		176 ^{Note4}		29										

Note1: PC, PH type is 24mm. Note2: EHN-C36 (PC, PH type) is 210mm. Note3: EHN-C36 (PC, PH type) is 10mm. Note4: EHN-C36 (PC, PH type) is 175mm.

EHN-KR (VC, VH, VS)

Model	W	(H)	(L)	(a)	b	(c)	d	(e)	(f)	(g)	h	i	j	k	l	m	n	o
EHN-B31	100	181	173	1	90	-	81.5	27	21	16	88	7	16	10	32	6.2	-	5
EHN-C31	116	191	192	9	100	-	105	29	18		100	8	37	15	30	7	95	8
EHN-C36			191															

EHN-R (PP)

Model	W	(H)	(L)	(a)	b	(c)	d	(e)	(f)	(g)	h	i	j	k	l	m	n	o
EHN-B11, 16	100	190	202	14	90	155	81.5	25	21	47	88	7	16	10	32	6.2	-	5
EHN-B31		202	203	2		167		27										
EHN-C21	116	200	220	24	100	165	105	27	18	47	100	8	37	15	30	7	95	8
EHN-C31		212	222	8		177		29										
EHN-C36		211		9		176												

EHN-R

Model	W	(H)	(L)	(a)	b	(c)	d	(e)	(f)	(g)
EHN-B11, 21	100	174	167	27	90	153	81.5	25	21	12
EHN-C21	116	189	185.5	37	100	163	105	27	18	12
EHN-C31			191.5	18.5		29				
EHN-C36			191			181.5		28.5		16

EHN-R (SH)

Model	W	(H)	(L)	(a)	b	(c)	d	(e)	(f)	(g)
EHN-B11, 21	100	174	188	34	90	146	81.5	24	21	34
EHN-C21	116	189	209	34	100	156	105	26	18	36.5
EHN-C31			208.5	31		166		28		
EHN-C36						169				34

EHN-YN (VC, VH, VS, PC, PH, PS, PP)

Model	W	(H)	(L)	(a)	b	(c)	d	(e)	(f)	(g)
EHN-B11, 16, 21	100	191	218	14	90	154	81.5	25	21	47
EHN-B31		201	220	1		166		27		
EHN-C16, 21	116	199	220	25 ^{Note1}	100	164	105	27	18	47
EHN-C31, 36		211 ^{Note2}	239 ^{Note3}	9 ^{Note4}		176 ^{Note5}		29		

Note1: PC, PH type is 24mm. Note2: EHN-C36 (PC, PH type) is 210mm. Note3: EHN-C36 is 238mm.

Note4: EHN-C36 (PC, PH type) is 10mm. Note5: EHN-C36 (PC, PH type) is 175mm.

EHN-YN (PP)

Model	W	(H)	(L)	(a)	b	(c)	d	(e)	(f)	(g)
EHN-B11, 16	100	190	202	14	90	155	81.5	25	21	47
EHN-B31		202	203	2		167		27		
EHN-C21	116	200	220	24	100	165	105	27	18	47
EHN-C31		212	222	8		177		29		
EHN-C36		211		9		176				

EHN-YN (SH)

Model	W	(H)	(L)	(a)	b	(c)	d	(e)	(f)	(g)
EHN-B11, 21	100	191	204.5	34	90	146	81.5	24	21	34
EHN-C21	116	206.5	225.5	44	100	156	105	26	18	36.5
EHN-C31			225	34		166		28		
EHN-C36			225	31		169				34

IWAKI CO., LTD.

6-6 Kanda-Sudacho 2-chome Chiyoda-ku Tokyo 101-8558 Japan TEL : (81)3 3254 2935 FAX : 3 3252 8892

IWAKI has global net work. Please find your distributor location at

www.iwakupumps.jp

European Headquarter
Germany
The Netherlands (Netherlands Branch)
Italy (Italy Branch)
Spain (Spain Branch)
Poland (East Europe Branch)
Denmark
Finland
Norway
Sweden
Belgium
France

IWAKI Europe GmbH
IWAKI Nordic A/S
IWAKI Suomi Oy
IWAKI Norge AS
IWAKI Sverige AB
IWAKI Belgium N.V.
IWAKI France S.A.

TEL: (49)2154 9254 0 FAX: (49)2154 9254 48
TEL: (49)2154 9254 50 FAX: (49)2154 9254 55
TEL: (31)74 2420011 FAX: (49)2154 9254 48
TEL: (39)0445 561219 FAX: (39)0445 569088
TEL: (34)934 741 638 FAX: (34)934 741 638
TEL: (48)12 347 0755 FAX: (48)12 347 0900
TEL: (45)48 242345
TEL: (358)10 201 0490
TEL: (47)23 38 49 00
TEL: (46)8 511 72900
TEL: (32)13 670200 FAX: (32)13 672030
TEL: (33)1 69 63 33 70 FAX: (33)1 64 49 92 73

U.S.A.
Brazil
China (Shanghai)
China (Hong Kong)
China (Guangzhou)
Singapore
Indonesia (Indonesia Office)
Malaysia
Korea
Taiwan
Thailand
Australia

IWAKI America Inc.
IWAKI Do Brasil Comercio De Bombas Hidraulicas LTDA.
IWAKI Pumps (Shanghai) Co., Ltd.
IWAKI Pumps Co., Ltd.
GFTZ IWAKI Engineering & Trading Co., Ltd.
IWAKI Singapore Pte Ltd.
IWAKI Singapore Pte Ltd.
IWAKI Kim SDN. BHD.
IWAKI Korea Co., Ltd.
IWAKI Pumps Taiwan Co., Ltd.
IWAKI (Thailand) Co., Ltd.
IWAKI Pumps Australia Pty Ltd.

TEL: (1)508 429 1440 FAX: (1)508 429 1386
TEL: (55)19 3244 5900 FAX: (55)19 3244 5900
TEL: (86)21 6272 7502 FAX: (86)21 6272 6929
TEL: (852)2607 1168 FAX: (852)2607 1000
TEL: (86)20 84350603 FAX: (86)20 84359181
TEL: (65)6316 2028 FAX: (65)6316 3221
TEL: (62)21 6906606 FAX: (62) 21 6906612
TEL: (60)3 7803 8807 FAX: (60)3 7803 4800
TEL: (82)2 6238 4800 FAX: (82)2 6238 4801
TEL: (886)2 8227 6900 FAX: (886)2 8227 6818
TEL: (66)2 322 2471 FAX: (66)2 322 2477
TEL: (61)2 9899 2411 FAX: (61)2 9899 2421

() Country codes

Caution for safety use: Before use of pump, read instruction manual carefully to use the product correctly. Actual pumps may differ from the photos. Specifications and dimensions are subject to change without prior notice. For further details please contact us.

Legal attention related to export. Our products and/or parts of products fall in the category of goods contained in control list of international regime for export control. Please be reminded that export license could be required when products are exported due to export control regulations of countries. The posting and copying from this catalogue without permission is not accepted firmly.