



Global Pump, Economical Price

The EJ Series provide precise chemical injection with an economical cost.
 Universal voltage capability enables operation from 100 - 240VAC in virtually all countries.
 The EJ Series are compact, simple to operate and have outputs to 4.8L/H and a maximum pressure of 1.2MPa.



High Speed Performance

The EJ Series operate at 360 strokes-per-minute, providing high resolution chemical feed and high turndown capability. Most competitive products operate at slower speeds, resulting in sludge feeding, accelerated diaphragm wear and poor feed control.

Universal Voltage

The Universal Voltage Function enables the EJ Series to operate at any AC voltage. The EJ Series also conform to global standards.

IP65 equivalent Protection

A robust housing protects the pump from normal wear. Mounting the Digital Display and Key Pad control within the drive housing creates a highly water resistant design. A clear cover further protects the pump from liquids.



Wet-end materials

Material symbol	VC	VH	VS ^{Note}
1 Pump head	PVC		
2 Valve	Alumina ceramic	HASTELLOY® C276 equivalent	SUS316 equivalent
3 O ring	FKM	EPDM	
4 Valve seat	FKM	EPDM	
5 Gasket	PTFE		
6 Diaphragm	PTFE+EPDM (EPDM is not wet end)		

Note : EJ-B31 only

PVC : Transparent polyvinyl chloride
 EPDM : Ethylene-propylene rubber
 FKM : Fluorine-contained rubber
 PTFE : Polytetrafluoroethylene

Pump identification

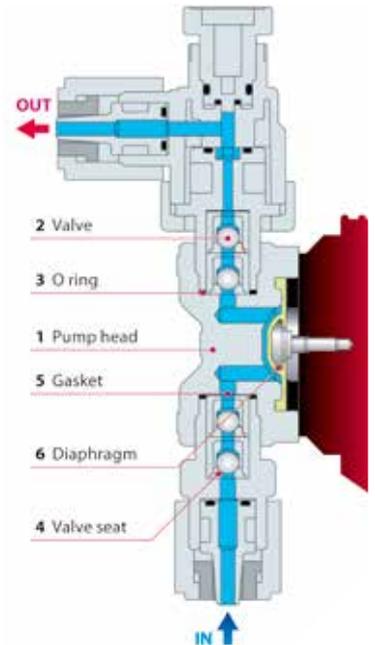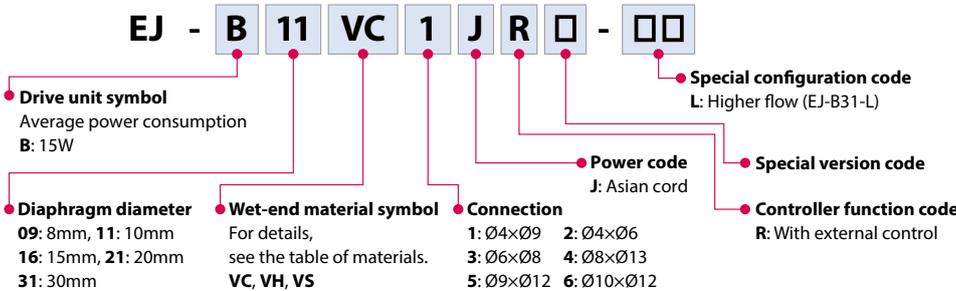

Specifications

Pump

Model	B09	B11	B16	B21	B31	B31-L
Max. capacity	L/H	1.14	1.8	3.0	4.8	9.0
	mL/min	19	30	50	80	150
Max. discharge pressure	MPa	1.2	1.0	0.6	0.3	0.2
Stroke rate	spm	1 to 360				
Power consumption	W	15				
Current (Input)	A	0.8				
Weight	kg	1.5			1.7	


- The above information is based on pumping clean water at rated voltage and ambient temperature.
 - Flow rates were collected at the maximum discharge pressure and 360spm.
 - A flow rate increases as a discharge pressure decreases.
 - Allowable ambient temperature: 0 to 40°C
 - Allowable liquid temperature: 0 to 40°C
 - Allowable power voltage deviation: ±10% of the rated voltage
 - Noise level: 65dB at 1m (A scale)

Controller

Operation mode	Mode	Manual
Mode selection	Mode	EXT
	Key operation	Key operation
Setting range	Setting range	1 to 360spm
	Spm programming	UP key
STOP function	Input signal	No-voltage contact or open collector ^{Note 1}
	Maximum spm	360spm
EXT mode	Pump behaviour	1 shots per signal ^{Note 2}
	Input signal	No-voltage contact or open collector ^{Note 1}
Monitors	LCD	7x3 LCD with three status codes
	LED	Green LEDx1 (blinks at each shot)
Buffer		Non-volatile memory
Power voltage ^{Note 3}		100 to 240VAC 50/60Hz

Note 1: The maximum applied voltage from the EJ to an external contact is 15V at 3mA.
 When using a mechanical relay, the minimum application load should be 3mA or below.
 Note 2: When the external pulse signal is entered to run the pump over the max spm, the signal is cancelled.
 Note 3: Observe the allowable voltage range of 90 to 264VAC. Otherwise failure may result.

Dimensions in mm

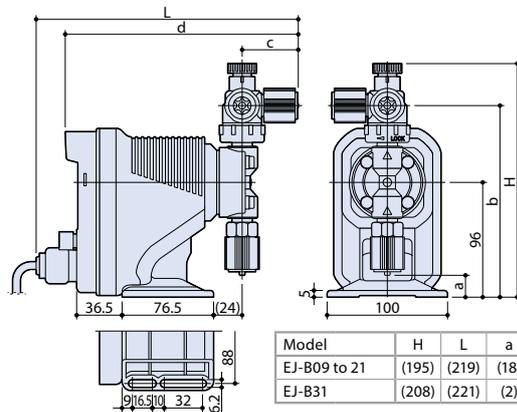

Optional accessories



IWAKI CO., LTD. 6-6 Kanda-Sudacho 2-chome Chiyoda-ku Tokyo 101-8558 Japan TEL : (81)3 3254 2935 FAX : 3 3252 8892 IWAKI has global net work. Please find your distributor location at www.iwakipumps.jp

European Headquarter Germany	IWAKI Europe GmbH TEL: (49)2154 9254 0 FAX: (49)2154 9254 48	U.S.A. Brazil	IWAKI America Inc. TEL: (1)508 429 1440 FAX: (1)508 429 1386
The Netherlands (Netherlands Branch)	IWAKI Europe GmbH TEL: (31)74 2420011 FAX: (31)74 2420011	China (Shanghai)	IWAKI Pumps (Shanghai) Co., Ltd. TEL: (86)21 6272 7502 FAX: (86)21 6272 6929
Italy (Italy Branch)	IWAKI Europe GmbH TEL: (39)0445 561219 FAX: (39)0445 569088	China (Hong Kong)	IWAKI Pumps Co., Ltd. TEL: (852)2607 1168 FAX: (852)2607 1000
Spain (Spain Branch)	IWAKI Europe GmbH TEL: (34)934 741 638 FAX: (34)934 741 638	China (Guangzhou)	GFTZ IWAKI Engineering & Trading Co., Ltd. TEL: (86)20 84350603 FAX: (86)20 84359181
Poland (East Europe Branch)	IWAKI Europe GmbH TEL: (48)12 347 0755 FAX: (48)12 347 0900	Singapore	IWAKI Singapore Pte Ltd. TEL: (65)6316 2028 FAX: (65)6316 3221
Denmark	IWAKI Nordic A/S TEL: (45)48 242345	Indonesia (Indonesia Office)	IWAKI Singapore Pte Ltd. TEL: (62)21 6906606 FAX: (62) 21 6906612
Finland	IWAKI Suomi Oy TEL: (358)10 201 0490	Malaysia	IWAKim SDN. BHD. TEL: (60)3 7803 8807 FAX: (60)3 7803 4800
Norway	IWAKI Norge AS TEL: (47)23 38 49 00	Korea	IWAKI Korea Co.,Ltd. TEL: (82)2 6238 8800 FAX: (82)2 6238 4801
Sweden	IWAKI Sverige AB TEL: (46)8 511 72900	Taiwan	IWAKI Pumps Taiwan Co., Ltd. TEL: (886)2 8227 6900 FAX: (886)2 8227 6818
Belgium	IWAKI Belgium N.V. TEL: (32)13 670200 FAX: (32)13 672030	Thailand	IWAKI (Thailand) Co.,Ltd. TEL: (66)2 322 2471 FAX: (66)2 322 2477
France	IWAKI France S.A. TEL: (33)1 69 63 33 70 FAX: (33)1 64 49 92 73	Australia	IWAKI Pumps Australia Pty Ltd. TEL: (61)2 9899 2411 FAX: (61)2 9899 2421

() Country codes

⚠ Caution for safety use: Before use of pump, read instruction manual carefully to use the product correctly. Actual pumps may differ from the photos. Specifications and dimensions are subject to change without prior notice. For further details please contact us.

⚠ Legal attention related to export. Our products and/or parts of products fall in the category of goods contained in control list of international regime for export control. Please be reminded that export license could be required when products are exported due to export control regulations of countries. The posting and copying from this catalogue without permission is not accepted firmly.