



RD-40 (High head type)

Max. discharge capacity: 25 L/min
 Max. head: 15 m

RD-40X (High flow type)

Max. discharge capacity: 70 L/min
 Max. head: 8 m

A compact centrifugal pump with canned motor further covers a higher flow rate.

Our RD series design features small canned motor centrifugal pumps powered by brushless DC motors. They are designed to be cool, quiet, compact and lightweight. A variety of features, including a seal-less design to prevent leakage, enables the pumps to meet a full spectrum of user needs, with emphasis on ease of installation, operation and maintenance. The high head type and the high flow type are new additions to the range. Choose the most suitable model from a wide selection.

Compact and lightweight with a seal-less structure

The pumps with a canned motor offer compactness and light weight. Compared with conventional magnetic drive pumps, they require minimal space for installation. Select the best connection for your plumbing system from tube, R pipe and NPT pipe. Seal-less structure eliminates wear leakage and other problems involved with seal replacement.

Long life design

Use of a DC brushless motor eliminates concerns over brush abrasion, ensuring a service life comparable to an AC motor.

Readily compliant with global safety standards

The RD series power voltage is classified as safety voltage (50V or less), which allow the user to easily comply with global safety standards such as UL, CSA and CE.

DC power system

The DC power system overcomes installation limits for voltage and frequency of each area.

Flow rate adjustment

Flow rate can be adjusted by means of an external signal of 1-5VDC.


Built-in drive circuit

A drive circuit is fitted as standard inside the pump. Connect power to the pump and provide an external signal to start operation.


High temperature resistance

The pump can handle hot liquids up to 80°C.

Construction & Wet-end materials

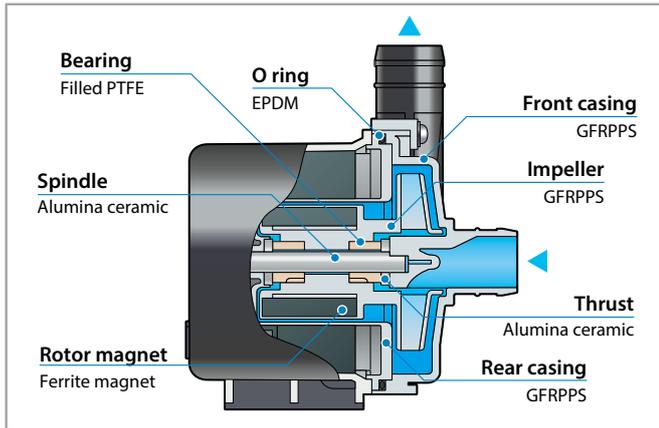

Pump identification

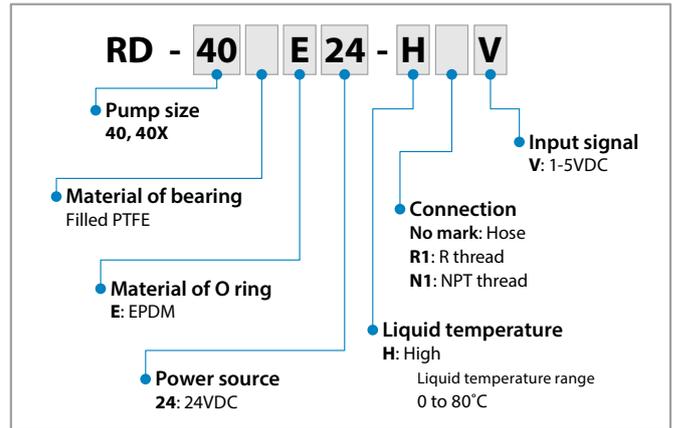


Specifications


Model	Connection		Max. discharge capacity	Max. head	Max. SG	Motor		Mass
	IN	OUT				Output	Power source	
RD-40	ø26 mm	ø19 mm	25 L/min	15 m	1.0	85W	24VDC	1.5 Kg
	R1	R1/2						
	NPT1	NPT1/2						
RD-40X	ø26 mm	ø26 mm	70 L/min	8 m	1.0	72W	24VDC	1.5 Kg
	R1	R3/4						
	NPT1	NPT3/4						

- The data is collected from operation with clean water at room temperature.
- The maximum capacity is obtained based on the presumption that delivery head is at 0 m. The maximum head is obtained based on the presumption that discharge capacity is at 0 L/min.
- The maximum viscosity is 1 mPa·s when the maximum specific gravity is 1.0.
- Operating condition Ambient temperature: 0 - 40°C, Liquid temperature: 0 - 80°C, Ambient humidity: 35 - 90%RH

Performance curves

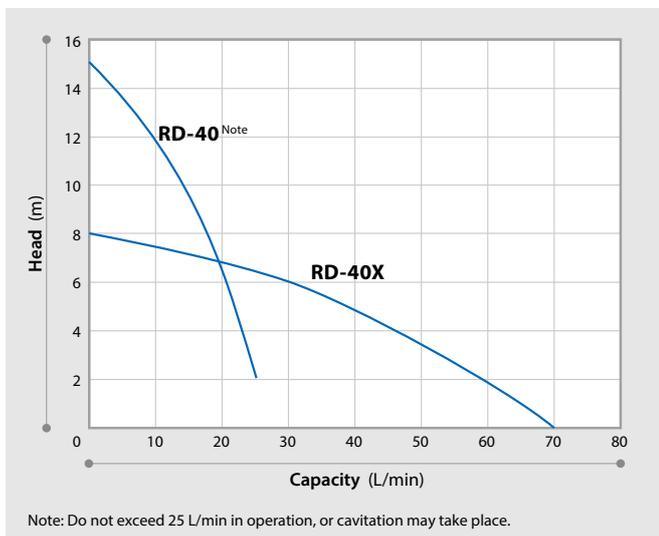

Dimensions in mm

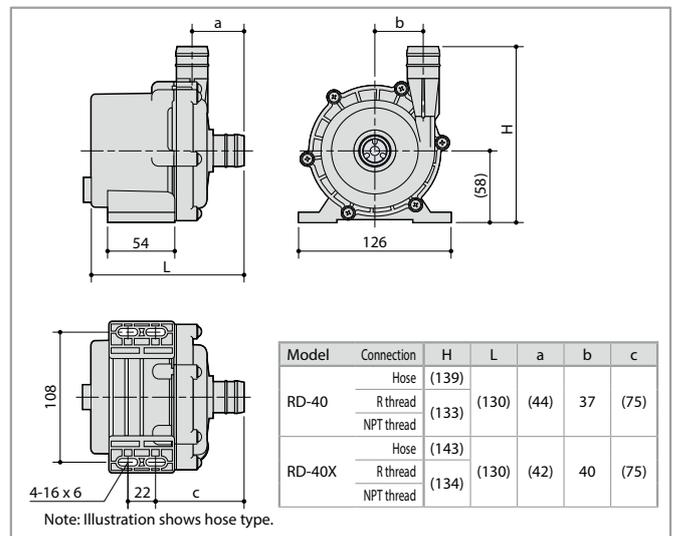

IWAKI CO., LTD. 6-6 Kanda-Sudacho 2-chome Chiyoda-ku Tokyo 101-8558 Japan TEL : (81)3 3254 2935 FAX : 3 3252 8892 IWAKI has global net work. Please find your distributor location at www.iwakipumps.jp

- | | | | | | |
|---|---|---|---|---|---|
| European office : IWAKI Europe GmbH
Germany : IWAKI Europe GmbH
Holland : IWAKI Europe GmbH (Netherlands Branch)
Italy : IWAKI Europe GmbH (Italy Branch)
Spain : IWAKI Europe GmbH (Spain Branch)
Belgium : IWAKI Belgium N.V.
Denmark : IWAKI Nordic A/S
Finland : IWAKI Suomi Oy
France : IWAKI France S.A.
Norway : IWAKI Norge AS
Sweden : IWAKI Sverige AB | TEL: (49)2154 9254 0
TEL: (49)2154 9254 50
TEL: (31)74 2420011
TEL: (39)0444 371115
TEL: (34)93 37 70 198
TEL: (32)13 67 02 00
TEL: (45)48 24 2345
TEL: (358)9 2745810
TEL: (33)1 69 63 33 70
TEL: (47)23 38 49 00
TEL: (46)8 511 72900 | FAX: 2154 9254 48
FAX: 2154 9254 55
FAX: (49)2154 925448
FAX: 0444 335350
FAX: 93 47 40 991
FAX: 13 67 20 30
FAX: 20 84350603
FAX: 1 64 49 92 73 | U.S.A. : IWAKI America Inc.
Argentina : IWAKI America Inc. (Argentina Branch)
Brasil : IWAKI Do Brasil Comercio De Bombas Hidraulicas LTDA.
Singapore : IWAKI Singapore Pte Ltd.
Indonesia : IWAKI Singapore (Indonesia Office)
Malaysia : IWAKIm Sdn. Bhd.
Australia : IWAKI Pumps Australia Pty Ltd.
Hong Kong : IWAKI Pumps Co., Ltd.
China : GFIZ IWAKI Engineering & Trading Co., Ltd.
: IWAKI Pumps (Shanghai) Co., Ltd.
Korea : IWAKI Korea Co., Ltd.
Taiwan : IWAKI Pumps Taiwan Co., Ltd.
Thailand : IWAKI (Thailand) Co., Ltd. | TEL: (1)508 429 1440
TEL: (54)11 4745 4116
TEL: (55)19 3244 5900
TEL: (65)6316 2028
TEL: (62)21 6906606
TEL: (60)3 7803 8807
TEL: (61)2 9899 2411
TEL: (852)2607 1168
TEL: (86)20 84350603
TEL: (86)21 6272 7502
TEL: (82)2 2630 4800
TEL: (886)2 8227 6900
TEL: (66)2 322 2471 | FAX: 508 429 1386
FAX: 19 3244 5900
FAX: 6316 3221
FAX: 21 6906612
FAX: 3 7803 4800
FAX: 2 9899 2421
FAX: 2607 1000
FAX: 20 84359181
FAX: 21 6272 6929
FAX: 2 2630 4801
FAX: 2 8227 6818
FAX: 2 322 2477 |
|---|---|---|---|---|---|

Caution for safety use: Before use of pump, read instruction manual carefully to use the product correctly.

Legal attention related to export. Our products and/or parts of products fall in the category of goods contained in control list of international regime for export control. Please be reminded that export license could be required when products are exported due to export control regulations of countries.

Actual pumps may differ from the photos. Specifications and dimensions are subject to change without prior notice. For further details please contact us.

The posting and copying from this catalogue without permission is not accepted firmly.